

Est. 2007



YOUR PATIENT WITNESS

CAMERA TRAPS cc

VAT Reg. No: 4640247856 | Co. Reg. No: 2008/129351/23

Tel: +27 (0) 83 560 0555 | +27 (0) 82 422 0356

E-mail: info@cameratraps.co.za

Website: www.cameratraps.co.za



INFORMATION


GLORY LTE CELLULAR - Black Flash + built-in viewing screen

UOVision **GLORY LTE CELLULAR** is a compact, LTE, weatherproof cellular black flash (no glow) remote control and transmitting camera trap that instantly transmits and notifies users of triggered footage (high-definition pictures or videos) to user-defined e-mail addresses (images or short video clips) or phone numbers (MMS images)



Face forward display

Display and control panel are aligned to the front.
Mounting is convenient.

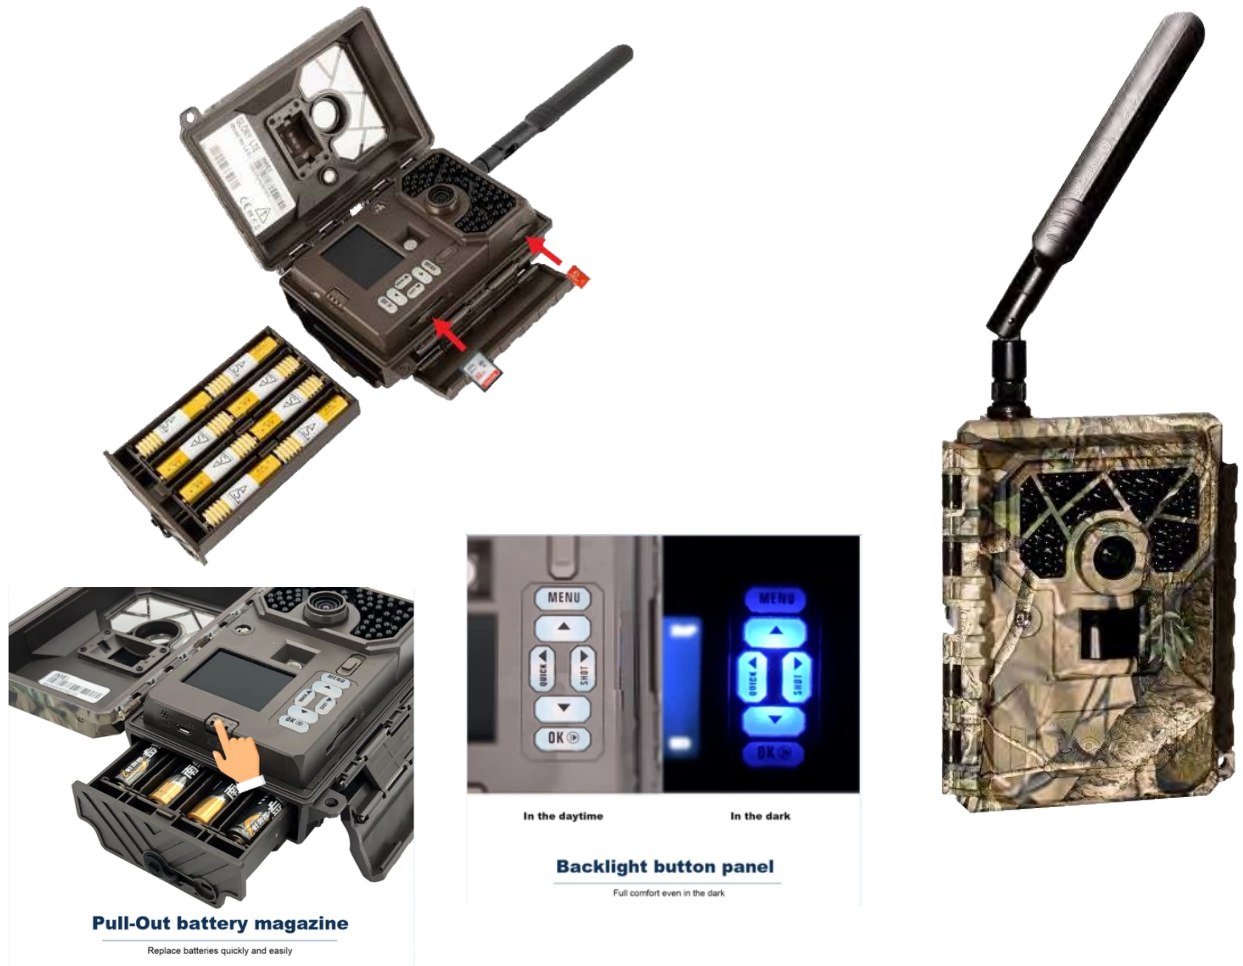

- Crystal clear picture quality (20MP resolution) with optional still picture resolutions settings of 20MP, 16MP, 12MP, 8MP, 5MP, 3MP
- Fast 0,4 seconds trigger speed.
- Full colour still pictures and videos during the day-time and black and white night time captures.
- Invisible and adjustable black flash (no glow) with a range of 20m+.
- Built-in, front-facing 2.0" color LCD display screen is useful when changing camera settings or watching pictures and videos in the field. When aiming the camera on site, the LCD shows the user exactly where the camera is aiming making set ups fast and easy.
- Uses 12 x AA size batteries with 2-3 month operating time (depending the amount of activity and operating temperature).
Batteries are loaded in to a tray which makes battery changes easy.
- Supports 1-10 burst photos per activation
- 1080P / 720P / WVGA selectable video with audio
- Time/date/temperature + battery status info on all pictures.
- SD card "over-write" feature so if the SD card is full, the camera starts over-writing pictures from the beginning and deleting old ones (*useful if the user is not able to check the camera so the camera won't stop recording if the SD card gets full*).
- Time-Lapse feature allows the camera to capture a photo or video at a user-set interval (with or without motion-heat source triggers from the PIR sensor).
- Weekly time table for Start-Stop feature allows user to pre-set the camera to work only during certain working hours for certain days. Extremely useful especially if used for proactive security...

**TECHNICAL SPECIFICATIONS:**

Picture Resolution	20MP, 16MP, 12MP, 8MP, 5MP, 3MP
Lens	F/NO=2.2 FOV(Field of View)=58°
Frequency Bands	FDD-LTE: B1/B3/B5/B7/B8/B20; TDD-LTE: B38/B40/B41; WCDMA: B1/B5/B8; GSM: 900/1800
IR-Flash (No glow)	(Low) 6m-12m, (High) 12m-25m
Display Screen	2.0" LCD
Memory Card	Up to 32GB standard size SD card
Video Resolution	WVGA,720P,1080P
PIR Sensor	Multi Zone
PIR Sensitivity	Adjustable (High/Normal/Low)
Trigger Time	High:0.4s / Low:0.6s
Operation / Storage Tem.	-20 - +60°C / -30 - +70°C
Trigger Interval	5s – 60 min.
Time lapse	3,4,5-55 min (in 5 min increments); 1-8 hours (in 1 hour increments); 2 hours/16 hours/20 hours/24 hours
Photo Burst	1–10
Video Length	5–60s
Power Supply	4×AA, 8×AA or 12AA or 6v external DC
Stand-by Current	< 0.25 mA (<6mAh/Day)
Low Battery Alert	LED Indicator; APP / Cloud alert
Mounting	Rope/Belt/Python lock
Dimensions	140 x95 x57 mm
Operation Humidity	5% - 90%
Security authentication	CE, RoHS

CAMERA TRAPS cc

Mobile: +27 (0) 83 560 0555 | +27 (0) 82 422 0356
Email: info@cameratraps.co.za
Web: www.cameratraps.co.za

CAMERA TRAPS cc is a **LEVEL 4 B-BBEE** CONTRIBUTOR